

WL-CART-FA

Water-line, filtering cartridge in polypropylene wirewound



DESCRIPTION:

Polypropylene wirewound filtering cartridge by 10, 25, 50 microns (throw-away cartridge). For filtration of: sand, scale, lime, rust, fine particles.


Domestic use: filtration of drinking water, protection of taps, boilers, washing machines.

Technical use: Pre-filtration for water-pumps, irrigation systems, protection of industrial installations; filtration of water and other liquids in industrial applications: chemical, petrochemical, photographic, electroplating, pharmaceutical. **Average life-span:** 3 - 6 months. **Maintenance:** none.

TECHNICAL DATA:

Maximum temperature of use 45 °C. Non-toxic materials. **Standard filtering septum:** polypropylene yarn. **Standard internal core:** polypropylene.

Suitable container	Type of WL-CART-FA Wirewound	Optimal range l/h	mm A	mm B	mm C
MINI	WL-CART-FA MINI	300	122	45	18
5"	WL-CART-FA H 5"	500	125	61	28
7"	WL-CART-FA H 7"	700	173	61	28
10"	WL-CART-FA H 10"	1000	250	61	28
20"	WL-CART-FA H 20"	2000	505	61	28

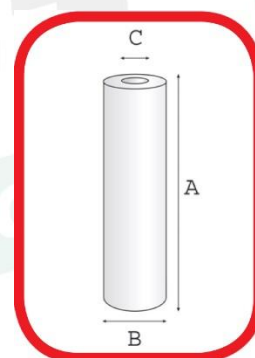

Filtration degrees available, in micron:

10 – 25 – 50 micron

Last update: 20.04.2023



PRODOTTI CHIMICI E TECNICI - CHEMICAL AND TECHNICAL PRODUCTS

FACOT CHEMICALS Srl - Via Crema 44, 26010 Capralba CR, Italy - Tel. +39 0373450642 - info@facot.it - www.facotchemicals.com



CHEMISTRY IN ACTION